



THE HEAT EXCHANGER SPECIALIST











Since **1981**

14000+

Installations

Innovative

Heat Transfer Technology

Specialist in Heat Exchanger made from

Exotic Materials



Mr. Aalap Patel, Mr. Mehul Mehta, Mr. Kirit Mehta, Mr. Himanshu Patel, Mr. Nilesh Patel, Mr. Harsh Patel

About us

Kinam Engineering Industries, a family owned business established in 1981 has built its reputation on the cornerstones of high quality products, customer satisfaction & superior service.

Fostered over by years of experience in both manufacturing and thermal designing of Heat Exchangers, Kinam has become one of the leading manufacturers of Shell & Tube Heat Exchangers (STHE), Corrugated Tube Heat Exchangers (CTHE), Spiral Heat Exchangers (SPHE), Plate Heat Exchangers (PHE) & Box Type Heat Exchangers.


Kinam has marked its presence across the globe by catering to its clientele in 22+ countries, with industries ranging from Chemical, Petrochemical, Fertilizers, Refineries, Pharmaceutical, Biotech, Oil, Paper, Steel, Cosmetics & Textile.


With extensive research and proven results, Kinam has developed the next generation heat exchanger "KICC". These exchangers are most efficient when it comes to condensing applications.

Innovative designs, new technological advancements, best in class manufacturing facilities and workmanship has enabled Kinam to deliver successfully 14000+ installations gaining trust of 500+ clients.

Kinam Engineering Industries joined hands with HLE Glascoat Limited, the leading manufacturer of process equipment. HLE Glascoat Limited is now the largest stakeholder in Kinam, this partnership will enable us to embark on a new chapter of expansion & innovation, helping us in transitioning to the next phase of our growth journey.

Kinam with its remarkable achievements continues to grow & be the leader in the heat transfer industry.

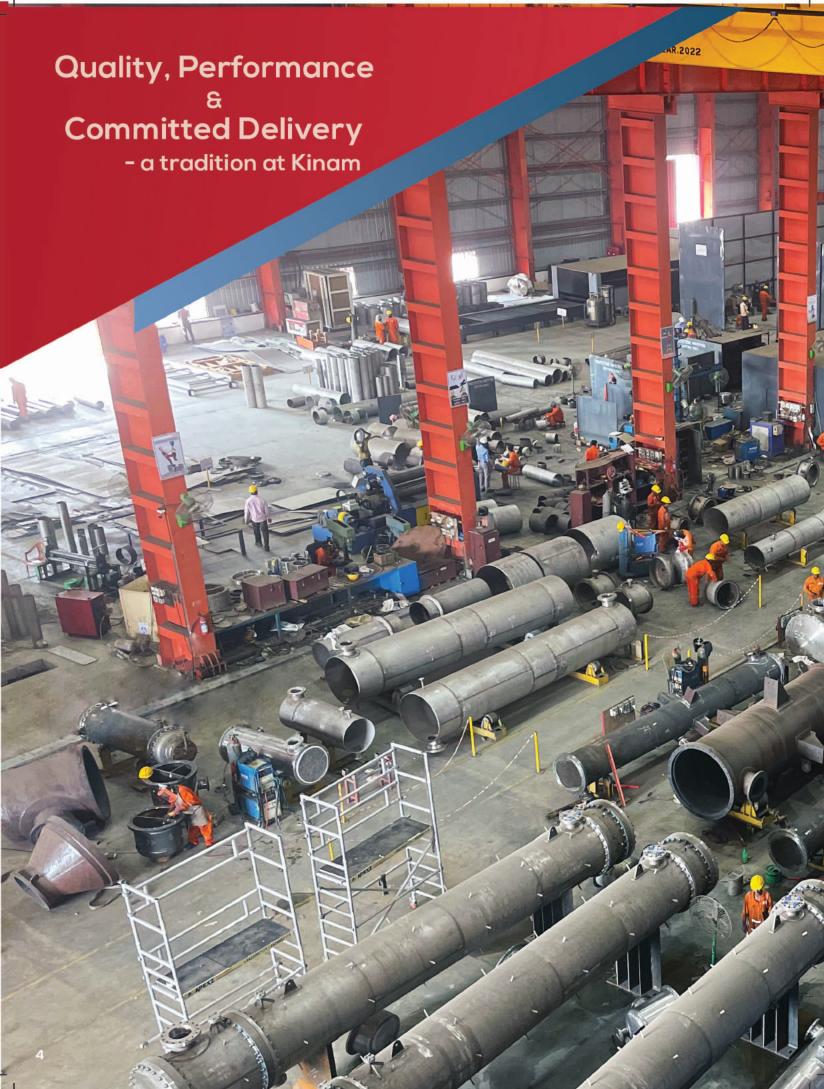

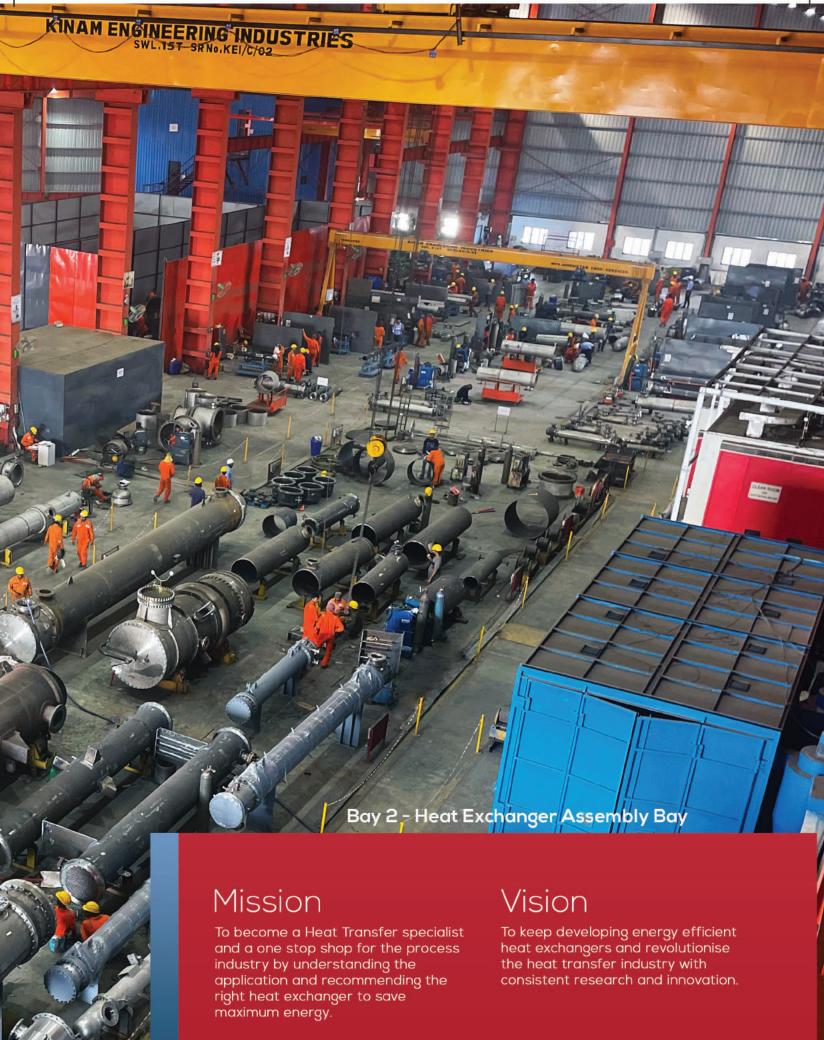

Our Facility

Infrastructure



Total area under crane - 1,10,000 sq. ft.

Team strength - 350+ personnel

Heat Transfer area range - lm² to 4000m²

Maximum weight handled per equipment-100 tons

Design



Thermal design HTRI



Mechanical design

PV Elite

Construction drawing

AutoCAD

GstarCAD

Proprietary Software



Cutting



CNC cutting upto 30 mm thick

Plasma cutting upto 100 mm thick

Laser cutting upto 16 mm thick

Dished End



Dished End forming upto 3 meter diameter and 25 mm thick

Rolling



Maximum width 2.5 meter

Maximum thickness 30 mm thick

Drilling



Tube-sheet drilling upto 400 mm thick & 4 meter diameter

Welding



GTAW SAW

Orbital Welding

Clean Room



1000 sq. ft Clean room for welding of Titanium

Shot Blasting & Painting Booth



Paint Booth Size: 5m x 10m x 5m (W x L x H)

Shot Blasting Room Size: 5m x 10m x 5m (W x L x H)

Testing



Hydraulic and Pneumatic testing

Vaccum testing

Helium leak Testing


Penetrant flow testing

Radiographic testing

Ultrasonic testing

PMI testing

Factory Interior

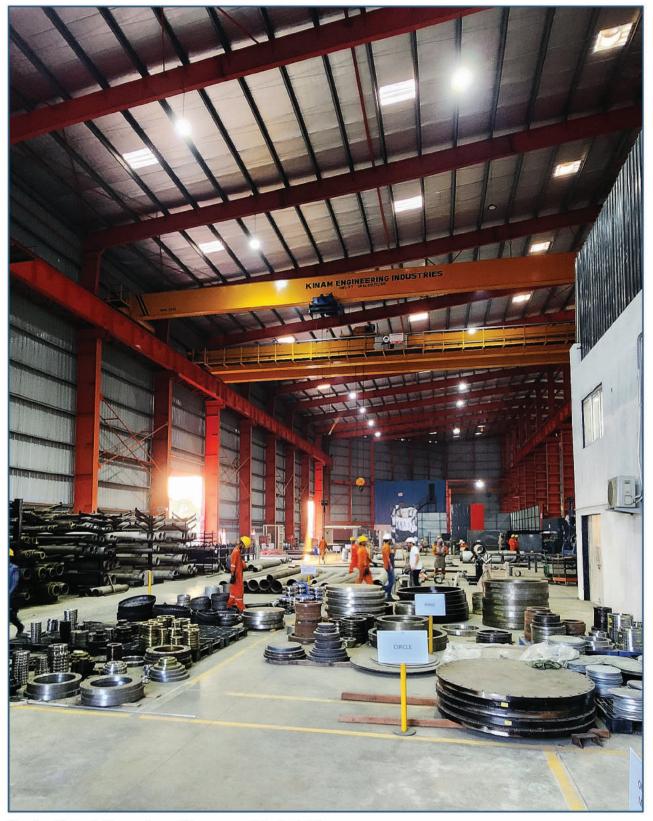

Bay 1 - Material Inward and Pre-assembly Activities

One Stop Shop












Shell & Tube Heat Exchanger

Construction Types

Fixed Tubesheet Type











Floating Head Type






Double Pipe Type








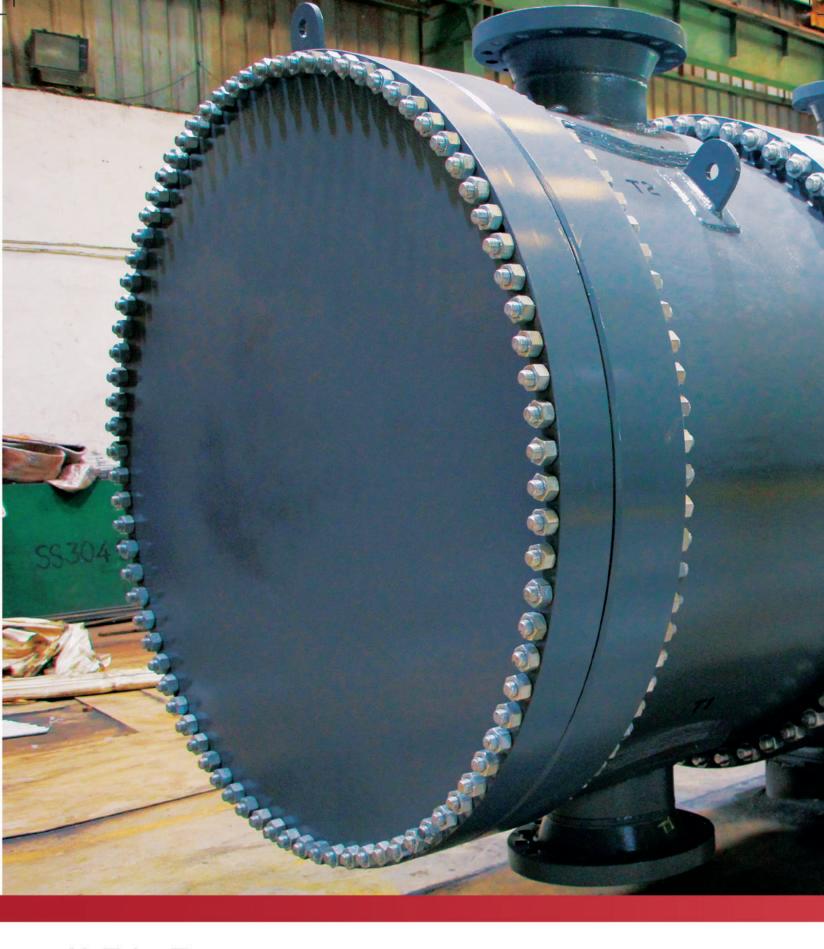

U–Tube Type










Kettle Type





Hair Pin (Removable Type)

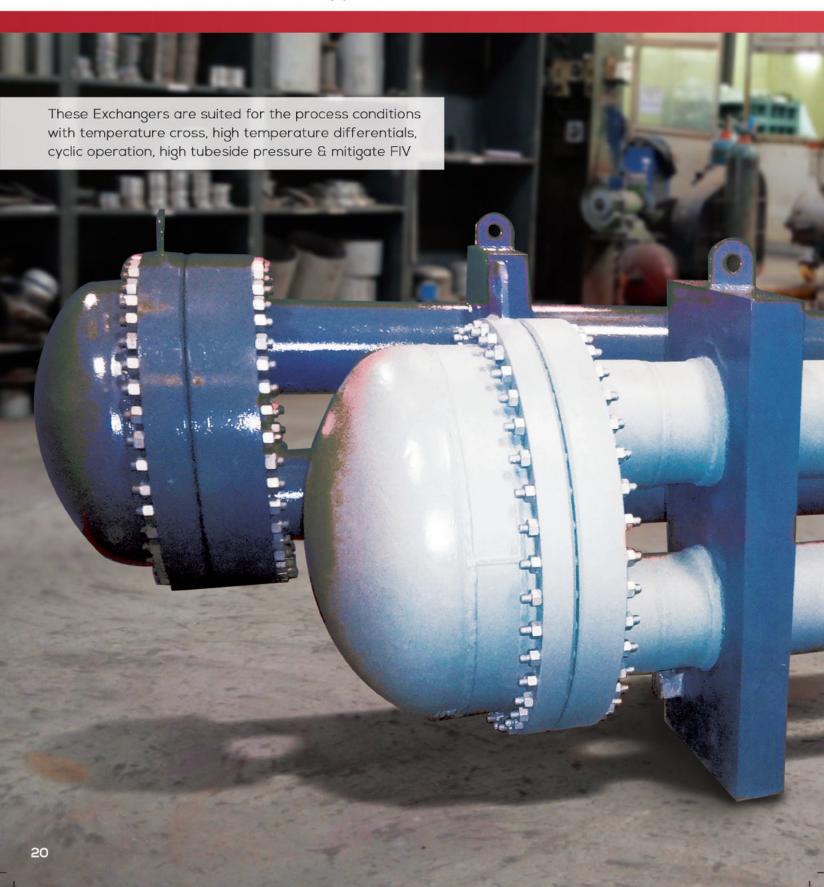

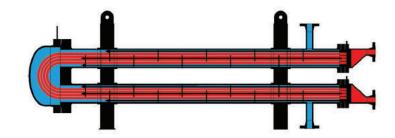





The most efficient condenser

KICC Technology

Corrugations are produced by indenting the tube along the length in a helical pattern with the use of a special purpose machine designed for corrugation of the tube without thinning of wall or development of stresses in the tube.

The helical pattern of the corrugations and the optimal depth of the indentation causes a two regime flow in the tube side fluid, spiral at core and eddies at the periphery creating turbulence even at a lower velocity of fluid resulting in higher Heat Transfer Coefficient.

KICC is the end-result of:

Kinam's ongoing research and development.


In-depth analysis of corrugation profiles and flow dynamics.

Constant testing for various condensing applications.

What is New?

New and improved corrugation profile for condensers resulting in even higher heat transfer coefficient. Compact and economical design, hence higher savings.

Manufacturability in all exotic materials like Hastelloy, Titanium, Tantalum and Super Duplex Steels etc.

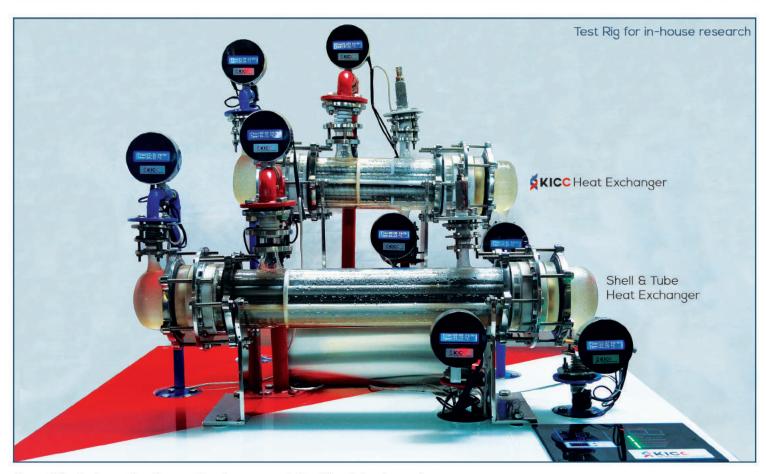

One of the test results of our extensive research had the following outcome:

Condenser	Shell side flow rates		Shell side Temp		Cooling Water temp		-		Heat Transfer Coefficient	
Туре	Steam In	Condensate Out	Steam In	Condensate Out	ln	Out	Tube length	No. of tubes	Kcal/h-m2-C	
STHE	13	12.2	98.75°C	97.9°C	53°C	33°C	570mm	7	423.8	
KICC	13.2	12.5	98.75°C	96.75°C	23°C	32.6°C	300mm	7	1.9 Times x 423.8	

Why KICC?





Higher Heat Transfer Coefficient

Turbulent flow inside the corrugated tubes due to it's helical indentation enables a more effective mixing & agitation resulting in a high heat transfer coefficient.

Drop Wise Condensation

Drop wise condensation resulting in better condensation compared to thin film formation in plain tubes. The corrugation provides a channel to the condensate layer formed on the surface of tube, always providing a fresh new surface for the vapours to condense.

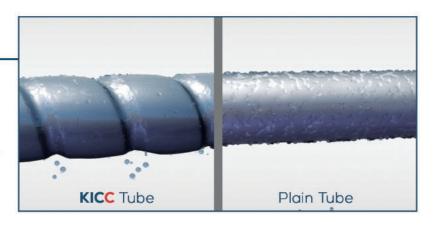

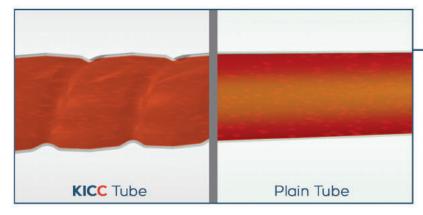


Equal Temperature Distribution

Even temperature distribution due to flow pattern, since new layers come in contact with the tube boundary.

Lower Fouling

Higher periphery turbulence does not allow the suspended solid particle in the tubes to settle, thus giving it a self-cleaning effect which results in reduced fouling that ensure longer running time. Easier to clean due to intermittent scaling as compared to Plain tube.

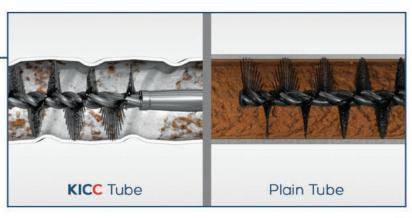

KICC combines best advantages of PHE and STHE

	Shell & Tube Hea	t Exchanger	Plate Heat E	Exchanger	KIC C Tube Heat Exchanger		
	same same						
Heat Transfer Coefficient	Low	-	High	+	High	+	
Size	Huge	-	Compac	t 🛨	Compact	t +	
Temperature Distribution	Non Unifor	m –	Uniform	+	Uniform	+	
Fouling	High	-	Low	+	Low	+	
High Pressure Application	Yes	+	No	_	Yes	+	
High Temperature Application	Yes	+	No	-	Yes	+	
Maintenance Cost	Low	+	High		Low	+	





Specially Designed For Pharmaceutical Industry

KIC-Box is your one-stop solution for all Pharmaceutical Condensing needs.

Integrated with new corrugated tube technology



KIC-Box Heat Exchangers replace the Primary and Secondary Condensers in a Solvent Recovery System.



- Compact Design: Reduced size of Heat Exchangers by 30-40%
- Economical: Up to 30-50% Savings
- Single Unit: One KIC-Box unit replaces both Primary and Secondary Condensers
- Fully Drainable: 100% Drainable on both sides
- Efficiency: Higher Condensation Efficiency through Cross Flow
- Cleanability: Higher Response to CIP Cleaning





The Next-Generation Spiral Heat Exchanger

Kinam introduces its new range of Sophisticated Spiral Heat Exchangers.

Our Spiral Heat Exchangers are well suited for several industries Including Chemical, Petroleum, Petro-Chemical, Agrochemical, Pharmaceutical, Veg-Oil Processing, Paper Pulp, Paint, and Waste water treatment.

K-SPEX is Manufactured in the following Specifications:

- Fully Welded For Clean Service
- One Side Openable For Dirty service

Applications where Spiral Heat Exchangers are used:

- Liquid/liquid Heating, pre-heating, cooling, interchanging
- Vapour/liquid Top condenser, reflux condenser, vacuum condenser, vent condenser, reboiler, etc

Special Cases:

- Fouling liquids containing suspended solids and fibres
- Highly viscous liquids like thick liqueurs, slurries and sludges
- Heat recovery applications like Veg.
 oil heat recovery, black liquor/
 white liquor, heat recovery,
 flash steam heat recovery, etc






Advantages:

Self Cleaning:

As the flow in K-SPEX is a fully developed turbulent flow, the continuous curving flow channel causes a self cleaning effect that prevents deposition fouling.




Self Cleaning Effect

High Heat Transfer Rates:

With studs and curvature of the single-channel promoting turbulent flow. K-SPEX can give twice the heat transfer coefficient when compared to Shell and Tube. A high heat transfer rate allows K-SPEX to be more compact in terms of area and volume.

High Percentage of Heat Recovery:

The continuously curved flow channels and studs produce high turbulence, thereby enhancing Heat Transfer Coefficient With practically 100% counter-current flow, K-SPEX has a high degree of heat recovery than the conventional STHE (Comparison of the 2 for reference as shown below).

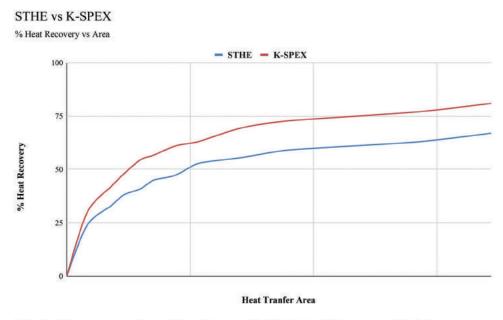

Suitable for High Vacuum Applications & Highly Viscous fluids:

The single flow channel & reduced fouling result in achieving very low-pressure drops in vacuum operations K-SPEX's unique design and reduced deposition fouling facilitates efficient handling of highly viscous fluids with lower maintenance requirement in a compact size.



Reduce your CAPEX with K-PEX



What are PHE'S?

A Plate Heat Exchanger is a type of Heat Exchanger that uses metal plates to transfer heat between two fluids.

The Plate Heat Exchanger facilitates the transfer of heat between two fluids, one cold and the other hot, by directing them through separate channels on different plates, sealed by gaskets to prevent any mixing between the two.

Thermally long plates

- High pressure loss
- High heat transfer value
- · High turbulence output
- Larger chevron angle

Thermally short plates

- · Low pressure loss
- · Low heat transter value
- · Low turbulence output
- · Low chevron angle

The optimum plate type is selected on the basis of the temperature profile to be satisfied under maximum permissible pressure drop.

Range of Manufacturing

Item	Range
Plate Thickness	0.4-1 mm
Volume Flow	5-4500 m3/hr
Port Size	DN 25 to DN 500
Design Pressure	Upto 40 Bar
Design Temperature	-50 to 250°C

Materials of Construction

TYPES OF PHE

- Gasketed
- · Semi Welded
- · Fully Welded

GASKET:

- NBR
- · EPDM
- · Viton (FKM)

PLATE:

- · SS 304 / 316
- · SMO
- Hastellov
- Titanium

Specialist in Heat Exchanger made from Exotic materials

Materials handled: Titanium / Hastelloy* / Inconel* / Monel* / Nickel 200 / Duplex / Super Duplex / Cu-Ni alloys

Inconel 825 Heat Exchanger






Duplex Heat Exchanger with Titanium Tubes

Specialist in Heat Exchanger made from Exotic Materials

Titanium Tube Bundle for chlorine recuperator (With PP baffles)



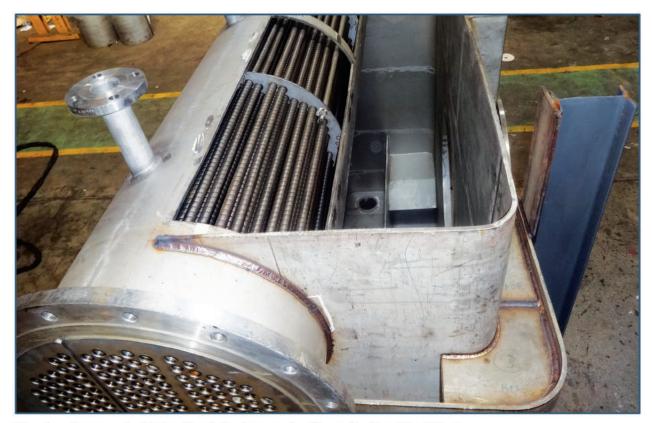

Titanium Corrugated Tube Heat Exchanger for De-salination Pilot Plant



Clean Room

Orbital Welding of Titanium Tube to Tubesheet Joint

C-22 Condenser with Corrugated Tubes






C-276 Reboiler

Closed Cooling Water Heat Exchanger 1028 m² made of Titanium



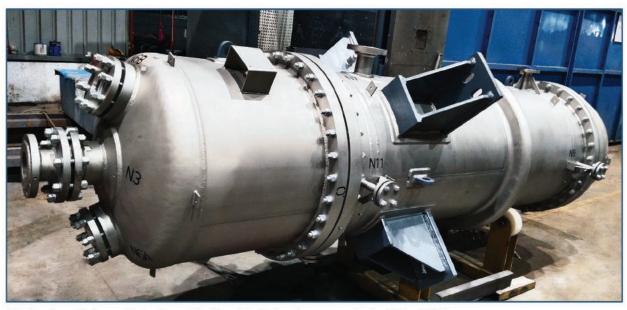

Distillation Column Reboiler with Double Tubesheet made in Nickel 200







Pre-heater 2200m²
Operating Temperature - 900°c
MOC - Stainless Steel 310
Weight - 56 tonnes
Exported to Copper mine at Zambia









Our Esteemed Clientele





























Kinam has supplied us Titanium Heat Exchangers for Chlorine Recuperator and we are satisfied with their overall performance. Their Welding quality and finish in Titanium is remarkable and recommendable.

Mr. Nimai Panigrahi, GM Projects. Grasim Industries Limited, Aditya Birla Group.

















Petrochemicals

Kinam has been our essential partner, manufacturing Hastalloy& Inconel 600 Heat Exchangers for our critical process applications . Kinam has always displayed consistent performance in quality & timely delivery.

Mr. Roshan Adhikari, GM Corporate Planning, Navin Fluorine International Limited





































Kinam has been supplying Corrugated Tube Heat Hxchanger since last 7 years to our various plants at Dabhasa, Mandideep, Ankleshwar, Tarapur and Visakhapatnam. We recommend corrugated tube heat exchangers over the traditional shell and tube heat exchangers looking at the performance for our solvent recovery applications.

Mr. Prabhat Jain, Sr. Manager Projects, Lupin Limited

Paints, Steel Paper,Oil & others

















Kinam is a reliable manufacturer of plain and corrugated tube heat exchangers. Their focus and specialisation in heat exchanger products has helped to deliver quality, competitive price and performance.

Mr. ArunWaghmare, VP - Technology and Projects,
Pidilite Industries



















Since 1981

Satisfying clients across 6 continents and 22+ countries





OFFICE:

209, Champaklal Indl.Estate, Next to Sion Telephone Exchange, Sion (E), Mumbai-400022, India. +91 - 22 - 46177687 / 88 / 89 www.kinam.in | sales@kinam.in

FACTORY:

M-4, MIDC, Pale Phase-III, Industrial Area, Additional Ambernath, Village - Pale, Taluka Ambernath, District - Thane 421506.

